

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
**WO 2004/045878 A3**

(51) International Patent Classification<sup>7</sup>: **B60Q 1/00, 1/26**

(21) International Application Number:  
PCT/US2003/037196

(22) International Filing Date:  
19 November 2003 (19.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/427,760 20 November 2002 (20.11.2002) US

(71) Applicant (for all designated States except US): **JOHNSON CONTROLS TECHNOLOGY COMPANY**  
[US/US]; 650 Waverly, Holland, MI 49423 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BARKER, Daniel,**


L. [US/US]; 5744 18th Avenue, Hudsonville, MI 49426 (US). **CICHOLSKI, Steven, J.** [US/US]; 1066 E. 12th Street, Holland, MI 49423 (US). **RUITER, Andrew, K.** [US/US]; 13137 Acacia Drive, Grand Haven, MI 49417 (US). **BAAS, James, H.** [US/US]; 997 Kenwood Drive, Holland, MI 49423 (US). **STENMAN, Robert, J.** [US/US]; 3490 Wkama Way, Saugatuck, MI 49453 (US). **FOX, Mathias, R.** [US/US]; 4563 Majestic Vue, Zeeland, MI 49464 (US). **KREUZE, Kenneth, D.** [US/US]; A-4920 146th Avenue, Holland, MI 49423 (US).

(74) Agent: **REICK, Harold, W.**; Price, Heneveld, Cooper, DeWitt & Litton, LLP, 695 Kenmoor, S.E., P.O. Box 2567, Grand Rapids, MI 49501-2567 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,

[Continued on next page]

(54) Title: **COVERED ILLUMINATED VANITY MIRROR ASSEMBLY**

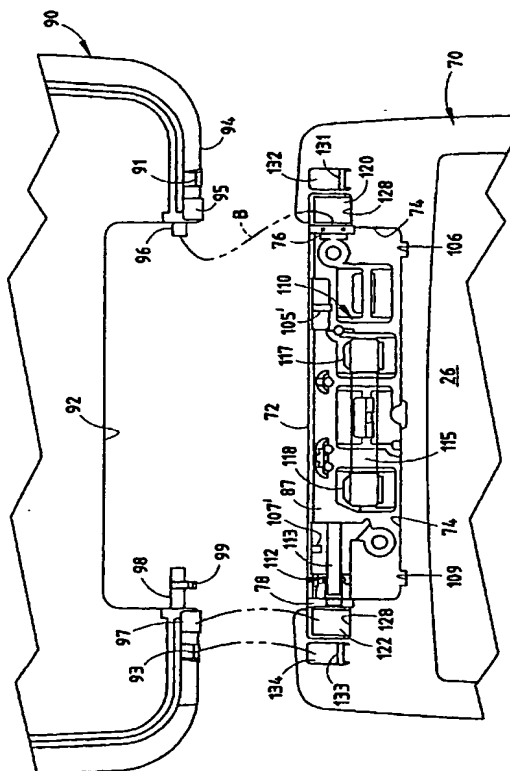

(57) Abstract: A vanity mirror frame (70) has insert-molded electrical contacts (117, 118) for holding a lamp in place in the frame and which, when assembled to a visor core, makes aligned electrical connections with the visor core electrical supply. Further, the vanity mirror frame includes a unique socket (78) for pivotally receiving and holding a mirror cover in place. Detent springs extend between the frame and cover for snap opening and closing of the cover between closed and open positions. The cover includes an additional cam (95, 97) which cooperates with an electrical switch when the cover is open to provide operating power to the lamp.